



Water

GWF



UNIC0coder[®] NTEP

Single-jet cold/hot water meter

Your benefits

- Mechanical roller register with 0.1 US gallons resolution:
Efficient consumption monitoring in energy data management
- Transfer of the effective meter reading:
No data loss and high quality of billing data
- Register without batteries:
No service life restriction
- Robust, high grade wear resistant materials:
Excellent measuring stability and reliability
- Measurement of low flow rates:
Increased cost effectiveness

Specifications 3/4"


Max flow rate	22 gpm
Nominal flow rate	11 gpm
Min flow rate (+ 1,5/- 5 %)	0.50 gpm
Max working pressure	230 psi
Max working temp	194°F
Nominal pipe size	3/4"
Connection on meter	1" NPSM thread
Main case material	Brass
Encoder resolution	1/10gal

Features

- NSF/ANSI 61-G & 372 certified and marked
- NTEP Approval CC 19-019A2
- Meets AWWA C712 accuracy standards in horizontal and vertical position
- Sealed register for tamper resistance
- Meter with high accuracy and durability
- Encoder Output – serial data interface to wired or wireless transmitting device

Encoder-Technology

The well-established GWFcoder[®]-system reads the absolute mechanical register value precisely and reliably and provides the data through standardized serial interfaces. The number wheels with three various long, asymmetrically arranged slots are being scanned through light pipes which are connected to five light emitting diodes (LED). Thus, the exact position of each number wheel can be detected and the encoded absolute register read can be transmitted as part of the M-Bus protocol. This functioning principle is patented by GWF. The GWFcoder[®]-interface provides an incomparably higher level of information compared to meters with pulse output.

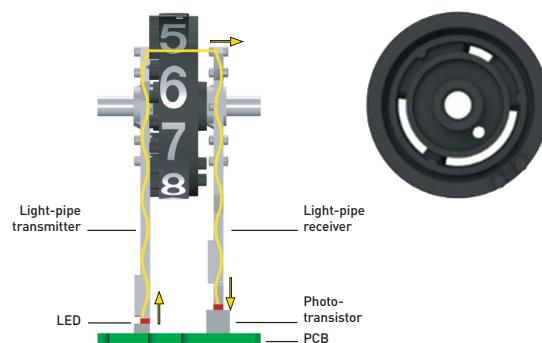


Meter absolut Encoder readout:

Absolute meter reading: 1236542.1 US gallons
 Serial number: 43215678
 Meter state: OK
 Medium: Water


Installation

Pipeline:	horizontal vertical up-flow vertical down-flow
Meter head:	facing up or sideways

Dimension Diagram

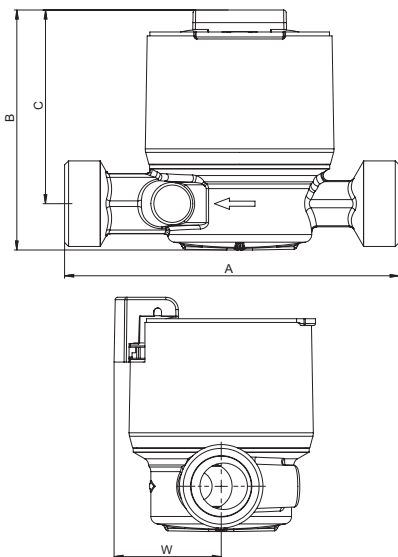

Accuracy chart

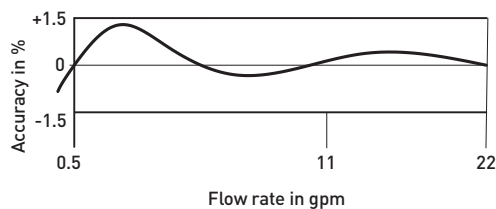

Comparison «absolute meter reading» vs. pulse

GWFCoder® technology:

Transfers the effective meter reading. The read-out value in the billing system and the invoice are the same as the meter reading.

Pulse transfer:

The potential sources of error for a reproduced meter reading with pulse transmission are:

- Bouncing
- Backflow water
- Temporary signal interruption
- Double pulses
- Incorrect pulse value

The readout value in the billing system and the invoice may differ from the meter reading leading to diminished revenue stream.


Technical Data

Dimensions and weights			
Length without couplings	A	inch	5.12"
Height	B	inch	3.7"
Height from pipe centre line	C	inch	3.0"
Installation depth from pipe centre line	W	inch	1.7"
Weight without couplings		lbs	1.57
Permissible ambient temperature UNICOcoder® MP		+41°F to +131°F	
Current consumption		max. 2 M-Bus Loads	
Meter Output Encoder Wired M-Bus		EN 13757-2/-3	
Meter Output Encoder ECO (for radio modules)		EN 13757-3	
Standard transmission speed		2400 baud	
Register protection class		IP67 or IP68	
Approval		Unico2coder MP	
NTEP cold/hot 33° - 156.7°F No. CC 19-019A2		■	
New York Certificate No. 10766		■	
Certifications		Unico2coder MP	
NSF/ANSI 61-G & 372 D.Hot / incl. cold		■	



Certified to NSF/ANSI 61-G & 372

Pressure loss chart

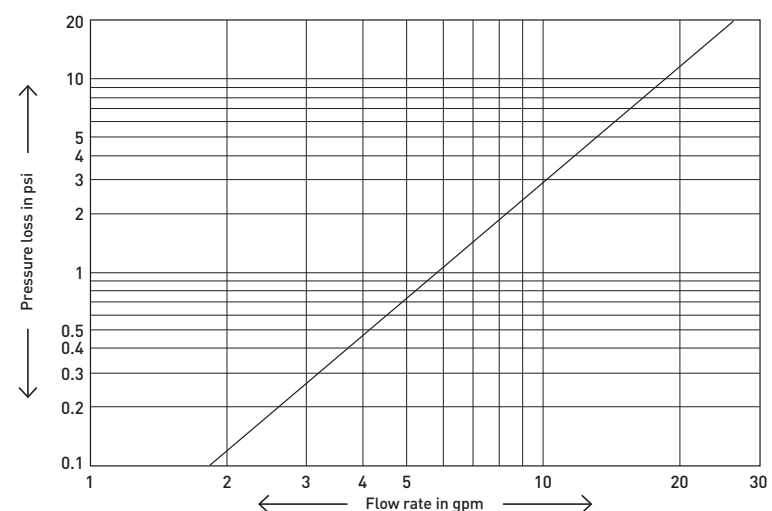

	Register	Interface	Billing/MDM	Revenue
Encoder register		$V = 110110001101110110$ Index transferral Serial data	7519619.6 	
Pulse register		$V =$ Pulse counting	7508260.2 	